


S C - V S 側溝縦断用 L=2000

■ 形状図 (水路幅500)

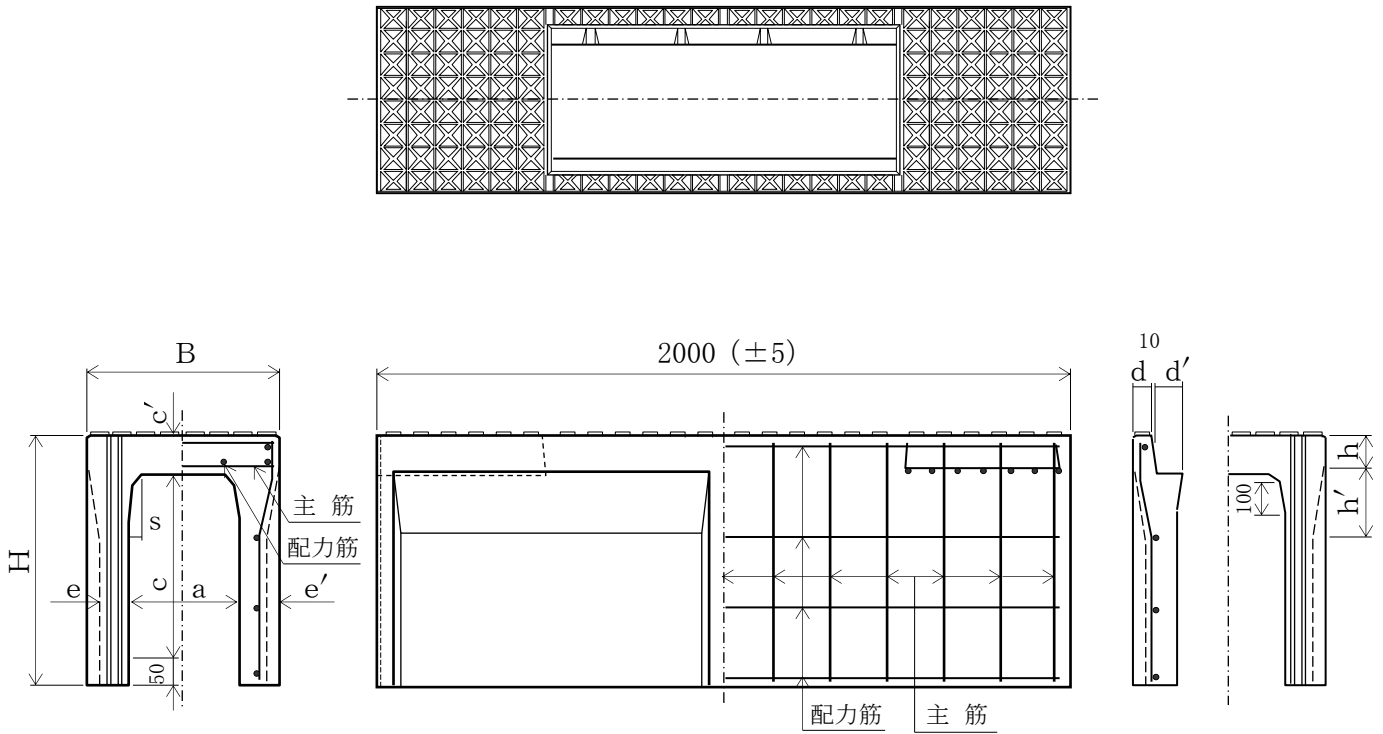

■ 規格表

呼び名	寸法(mm)											配筋								参考重量(kg)		
												側壁部				大はり部						
	B	H	a	c	c'	d	d'	e	e'	h	h'	s	主筋		配力筋		主筋		配力筋			
													径(mm)	本数	径(mm)	本数	径(mm)	本数	径(mm)		本数	
500 × 400	575		400										5.00	13	3.20	4	D6	8	4.00	6	610	
× 500	675		500									14									5	678
× 600	775		600		56.5	70			170	50		19									5	746
× 700	875		700									20									6	814
× 800	975		800									13									6	882
× 900	720	1075	500	900	125	55		110	125			D6	13	4.00	7	D6	8	4.00	6	1142		
× 1000		1175		1000																16	8	1231
× 1100		1275		1100																18	9	1320
× 1200		1375		1200		61.0	95			190	70									19	9	1409
× 1300		1475		1300																22	10	1498
× 1400		1575		1400								D10	13	5.00	10					1587		
許容差	±7	±5	±7	±5	±3	+3-2	-	+3-2	+3-2	-	-	-	-									