


S C - V S 側溝縦断用 L=1500

■ 形状図 (水路幅250・300・400)

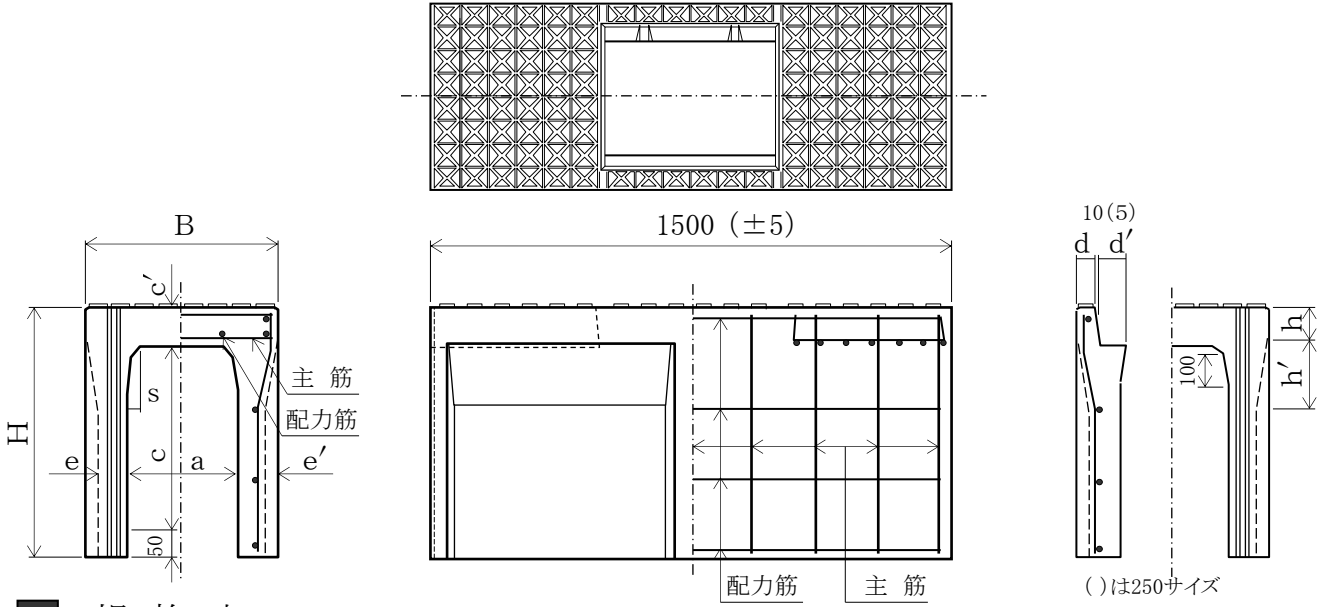

■ 規格表

呼び名	寸法(mm)											配筋								参考重量(kg)	
	B	H	a	c	c'	d	d'	e	e'	h	h'	s	側壁部				大はり部				
													主筋		配力筋		主筋		配力筋		
													径(mm)	本数	径(mm)	本数	径(mm)	本数	径(mm)		本数
250×300		430		300									4.00	10	3.20	4	D6	4	4.00	4	246
×400	400	530	250	400	80	50	30	55	75	90	100	30	11								288
×500		630		500									5.00	10							330
300×300		445		300			51.5					25	4.00	10		4					310
×400		545		400			52.5	55			150	30	11		4						356
×500		645		500									10	3.20	4						402
×600		745		600									5.00	12	5						525
×700	500	845	300	700	95	45	54.5		100	95		35	16	6	D6	5	4.00	4			589
×800		945		800			56.5	85			180	40	9	6							652
×900		1045		900									11	4.00	7						715
×1000		1145		1000									12		8						779
×1100		1245		1100			58.5					45	14	8							842
400×400		560		400			52.5					30	10	4							420
×500		660		500			54.5	60			160	40	11	3.20	5						470
×600		760		600									13	5							519
×700		860		700			56.5					45	15	6							686
×800	610	960	400	800	110	50	58.5	90	105	110			10	6	D6	7	4.00	5			753
×900		1060		900							190	50	11	7							820
×1000		1160		1000			61.0						12	8							887
×1100		1260		1100									13	9							954
×1200		1360		1200								55	15	9							1021
許容差	±5	±5	±5	±5	±3	+3-2	—	+3-2	+3-2	—	—	—	—								—